NIKPARAN

نیک پرن صنعت جم

Paran Sanat-e Jam
Nik Paran Sanat-e Jam
Nik Paran
Nik Paran Sanat-e Jam
Nik Paran Sanat-e Jam
Nik Paran Sanat-e Jam
Nik Paran Sanat-e
Nik Paran Sanat-e Jam
Nik Paran Sanat-e Jam
Nik Paran Sanat-e Jam
Nik Paran Sanat-e Jam
Nik Paran Sanat-e Jam
Nik Paran Sanat-e Jam
Nik Paran Sanat-e Jam



پلاگ فن


Plug Fan

NIK PARAN SANAT-E JAM

شرکت نیک پرن صنعت جم به شماره ثبت ۴۷۲۸۸۱ در راســتای تولید و عرضــه انواع فن و تجهیزات تاسیســات سرمایش ، گرمایش و تهویه مطبوع با بالاترین کیفیت، منطبق با آخرین تکنولوژی و بر پایه صرفه جویی در مصرف انرژی با راندمان بالا فعالیت خود را آغاز نموده و سعی دارد تا با شناخت و بررسی دانش روز و بکارگیری در محصولات خود، گامی موثر در طراحی و ارائه کالاهای با کیفیت و مدرن بردارد.

شرکت نیک پرن صنعت جم با همکاری مهندسان مجرب در زمینه طراحی، نظارت و اجرای خدمات تاسیسات مکانیکی و تهویه مطبوع آماده ارائه خدمات مشــاوره، طراحی و اجرای سیستم های تاسیساتی می باشد.

www.nikparan.ir
info@nikparan.ir

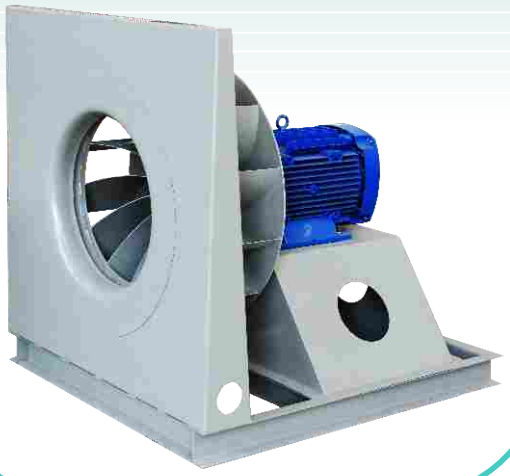

■ پلاگ فن
Plug Fan ■

- این گروه از فن ها برحسب سفارش جهت نصب در داخل هواساز، کوره، خشـــک کن یا اتاقک هایی که نیاز به پخش شدن یکنواخت گرما در محیط ، یا در مکان هایی که نیاز به گردش هوا داشته باشـند اسـتفاده می شوند.
- پروانه این دستگاه می تواند از نوع بکوارد یا فوروارد باشد.
- انتقال نیرو در این نوع فن به دو صورت می باشد:
- مستقیم(Direct Drive):


پروانه مستقیماً بر روی شافت الکتروموتور نصب می گردد.

- فولی و تسمه (Belt Drive):


این دسته دارای حلزونی یا کانال نبوده و پروانه به صورت مستقیم در محیط قرار می گیرد.

- در صورت نیاز جهت جلوگیری از انتشار حرارت و آسیب رساندن به الکتروموتور میتوان دستگاه را به عایق مناسب مجهز نمود .

Nik Paran Plug Fan — Schematic Design

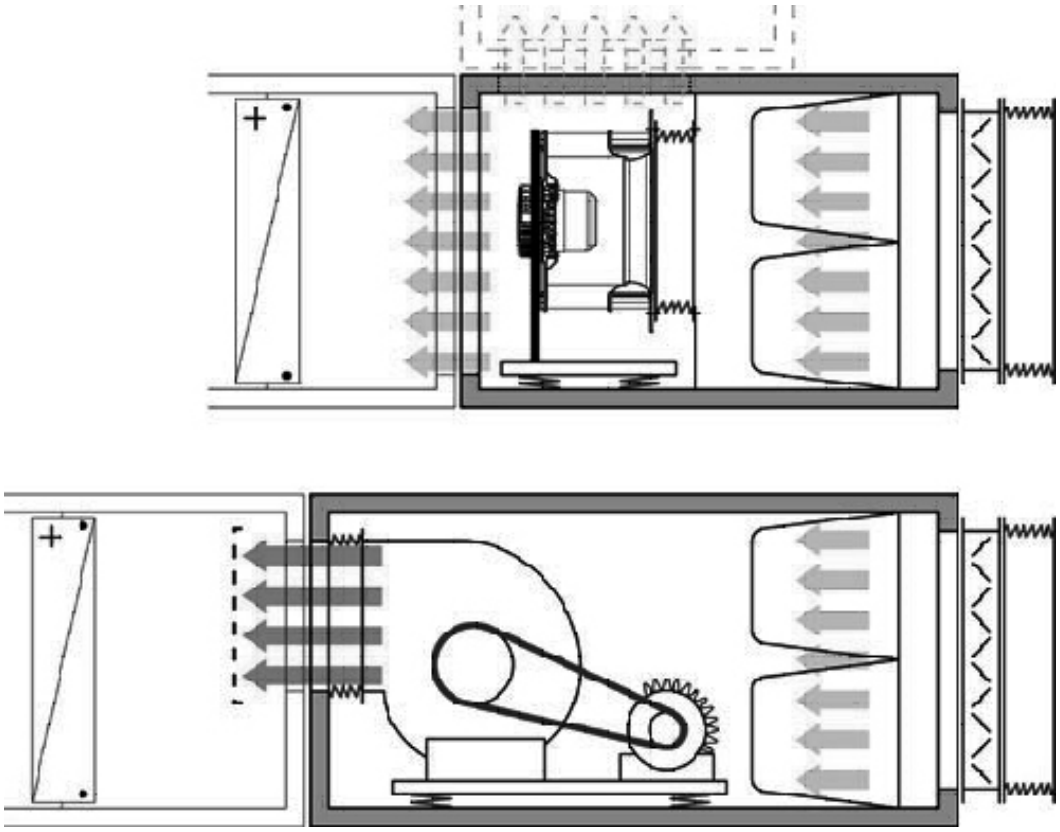


NP-CDP-280

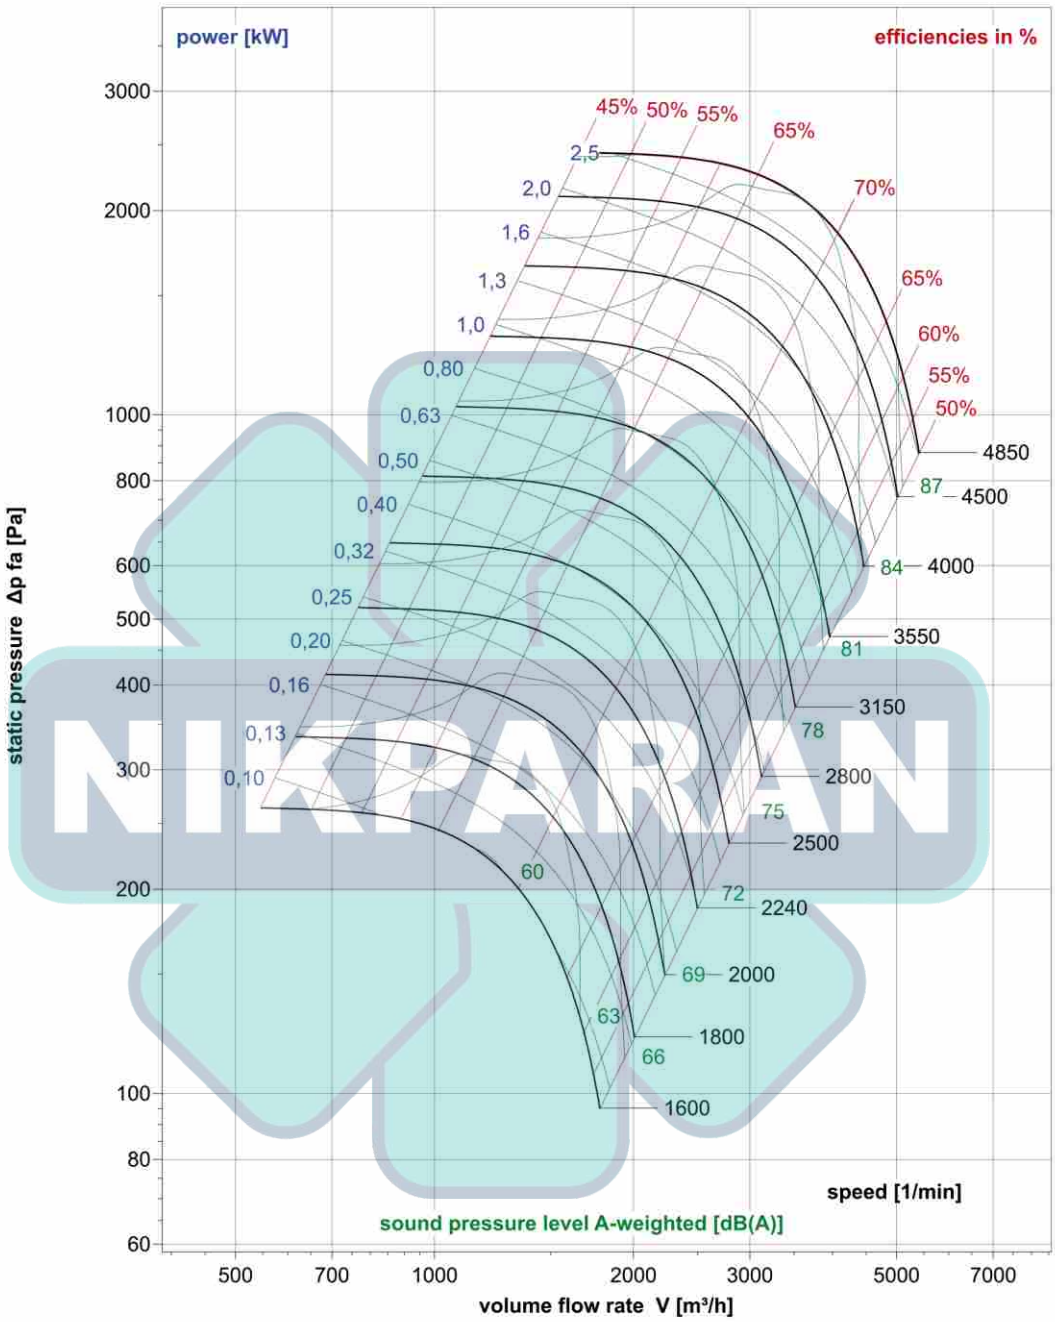

FAN SIZE		"K" factor correction for spectrum noise of CDP							
		Octave band (Hz)							
		63	125	250	500	1K	2K	4K	8K
CDP 280	inlet	-4	-5	-2	-5	-8	-11	-15	-20
	outlet	-2	-3	0	-3	-4	-8	-11	-16

Measurement according to DIN 24163 (test bench arrangement C), ρ =1.2 kg/m³, sound pressure level measured at 1 m distance


NP-CDP-315

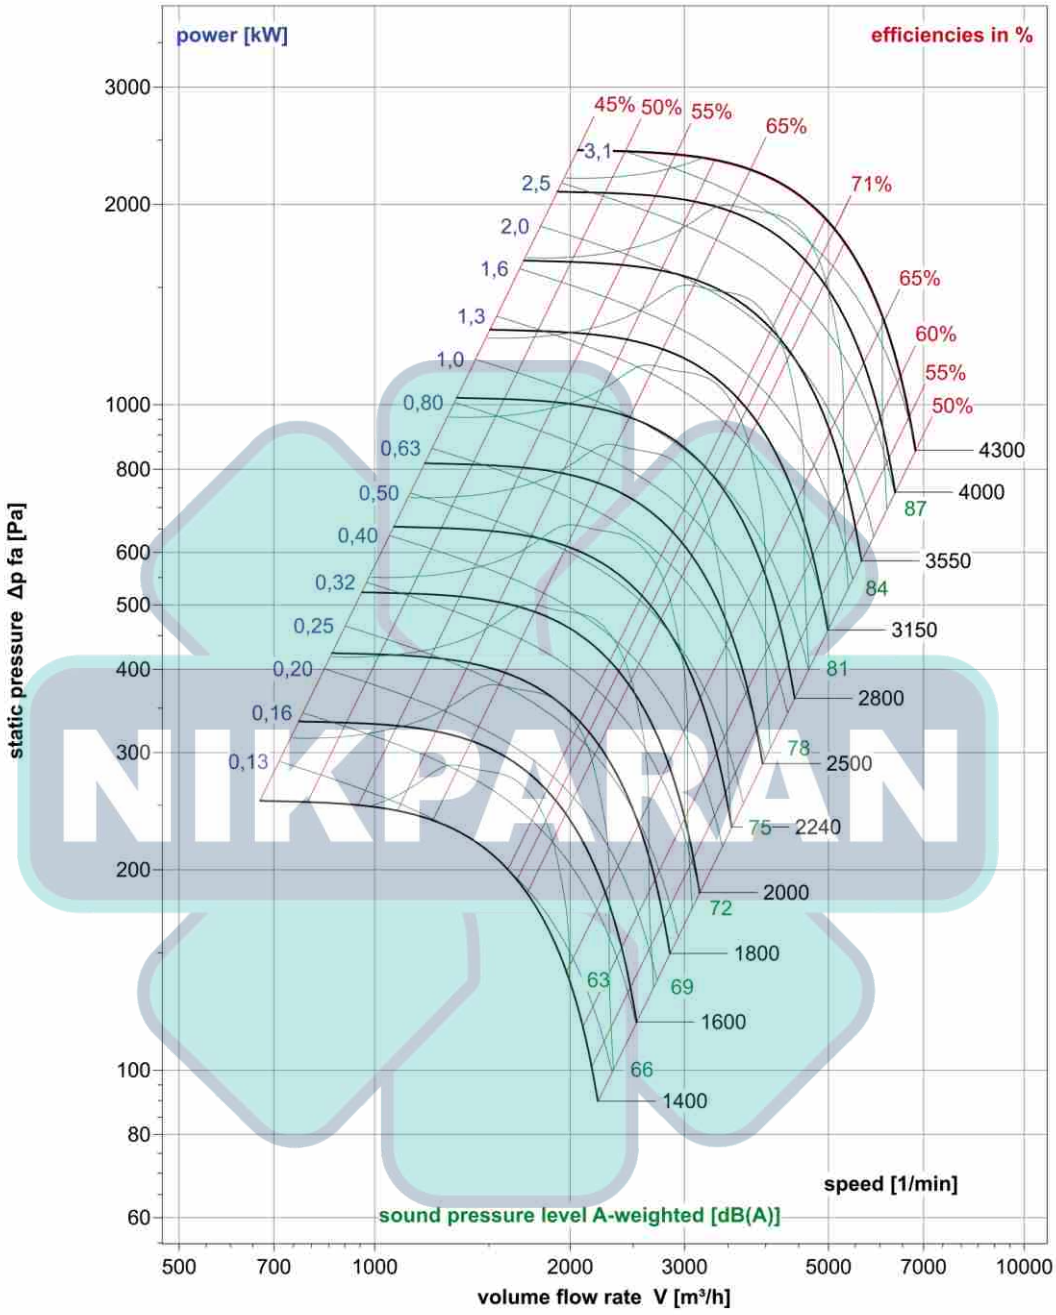

FAN SIZE		"K" factor correction for spectrum noise of CDP							
		Octave band (Hz)							
		63	125	250	500	1K	2K	4K	8K
CDP315	inlet	-4	-5	-2	-5	-8	-11	-15	-20
	outlet	-2	-3	0	-3	-4	-8	-11	-16

Measurement according to DIN 24163 (test bench arrangement C), ρ =1.2 kg/m³, sound pressure level measured at 1 m distance


NP-CDP-355

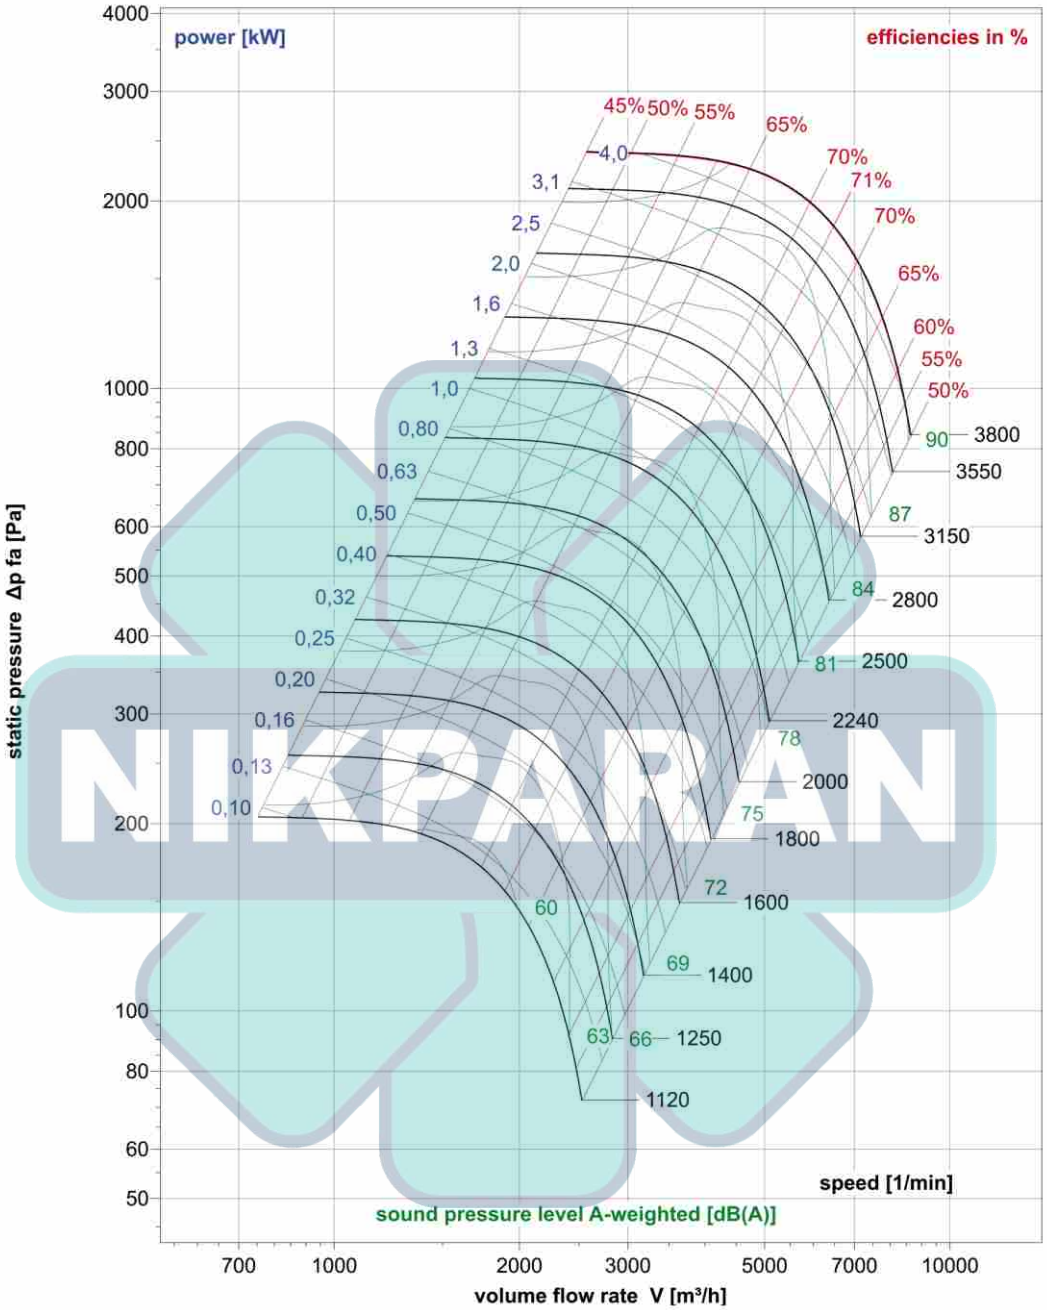

FAN SIZE		"K" factor correction for spectrum noise of CDP							
		Octave band (Hz)							
		63	125	250	500	1K	2K	4K	8K
CDP355	inlet	-4	-5	-2	-5	-8	-11	-15	-20
	outlet	-2	-3	0	-3	-4	-8	-11	-16

Measurement according to DIN 24163 (test bench arrangement C), ρ =1.2 kg/m³, sound pressure level measured at 1 m distance


NP-CDP-400

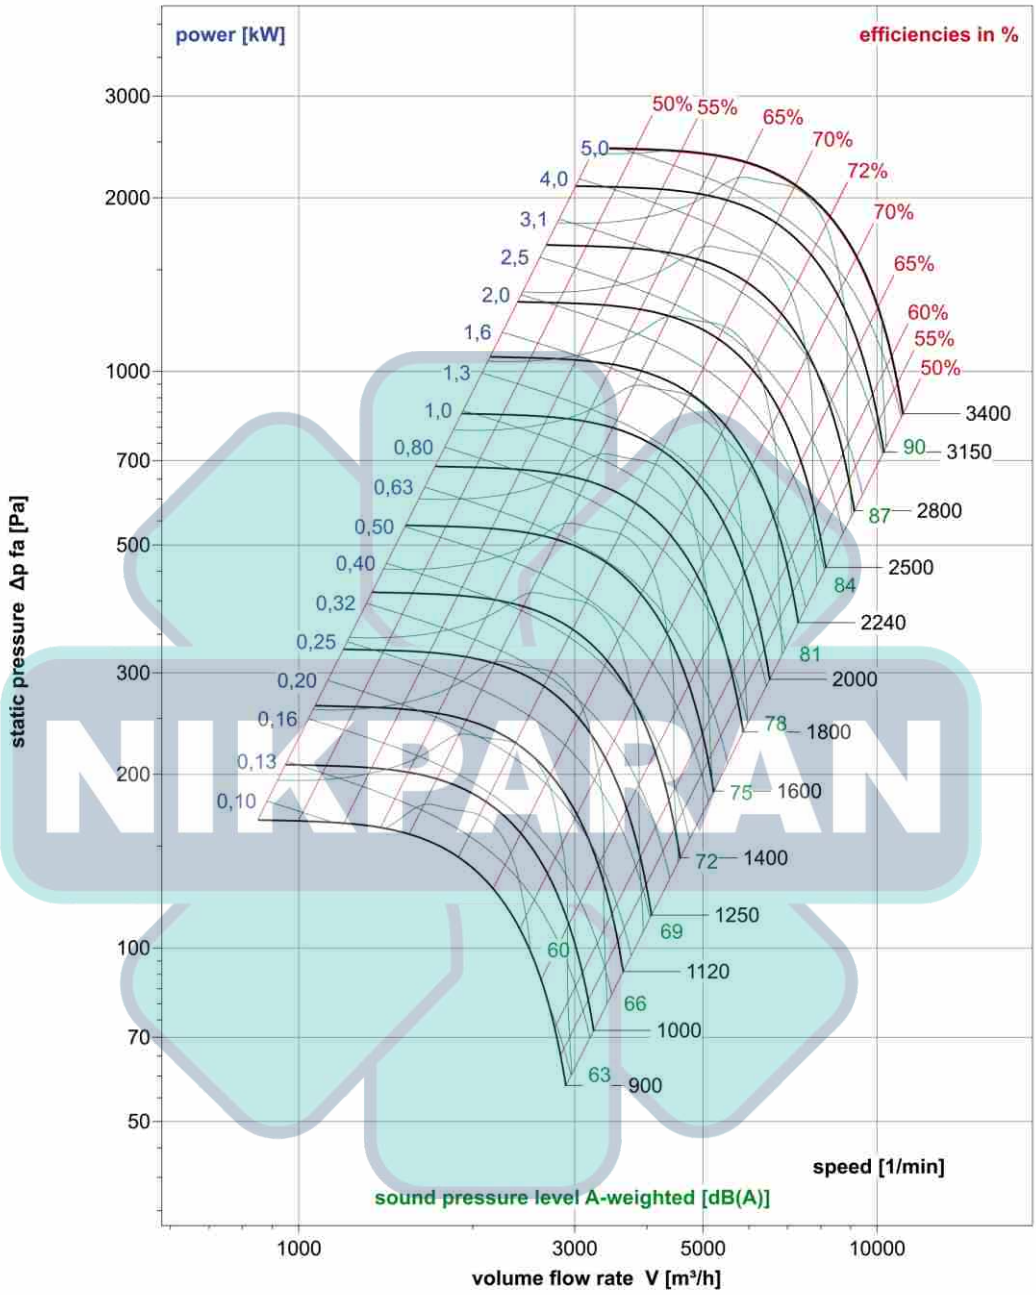

FAN SIZE		"K" factor correction for spectrum noise of CDP							
		Octave band (Hz)							
		63	125	250	500	1K	2K	4K	8K
CDP400	inlet	-6	-5	-3	-4	-8	-11	-15	-20
	outlet	-3	-2	-1	-2	-4	-8	-11	-16

Measurement according to DIN 24163 (test bench arrangement C), ρ =1.2 kg/m³, sound pressure level measured at 1 m distance


NP-CDP-450

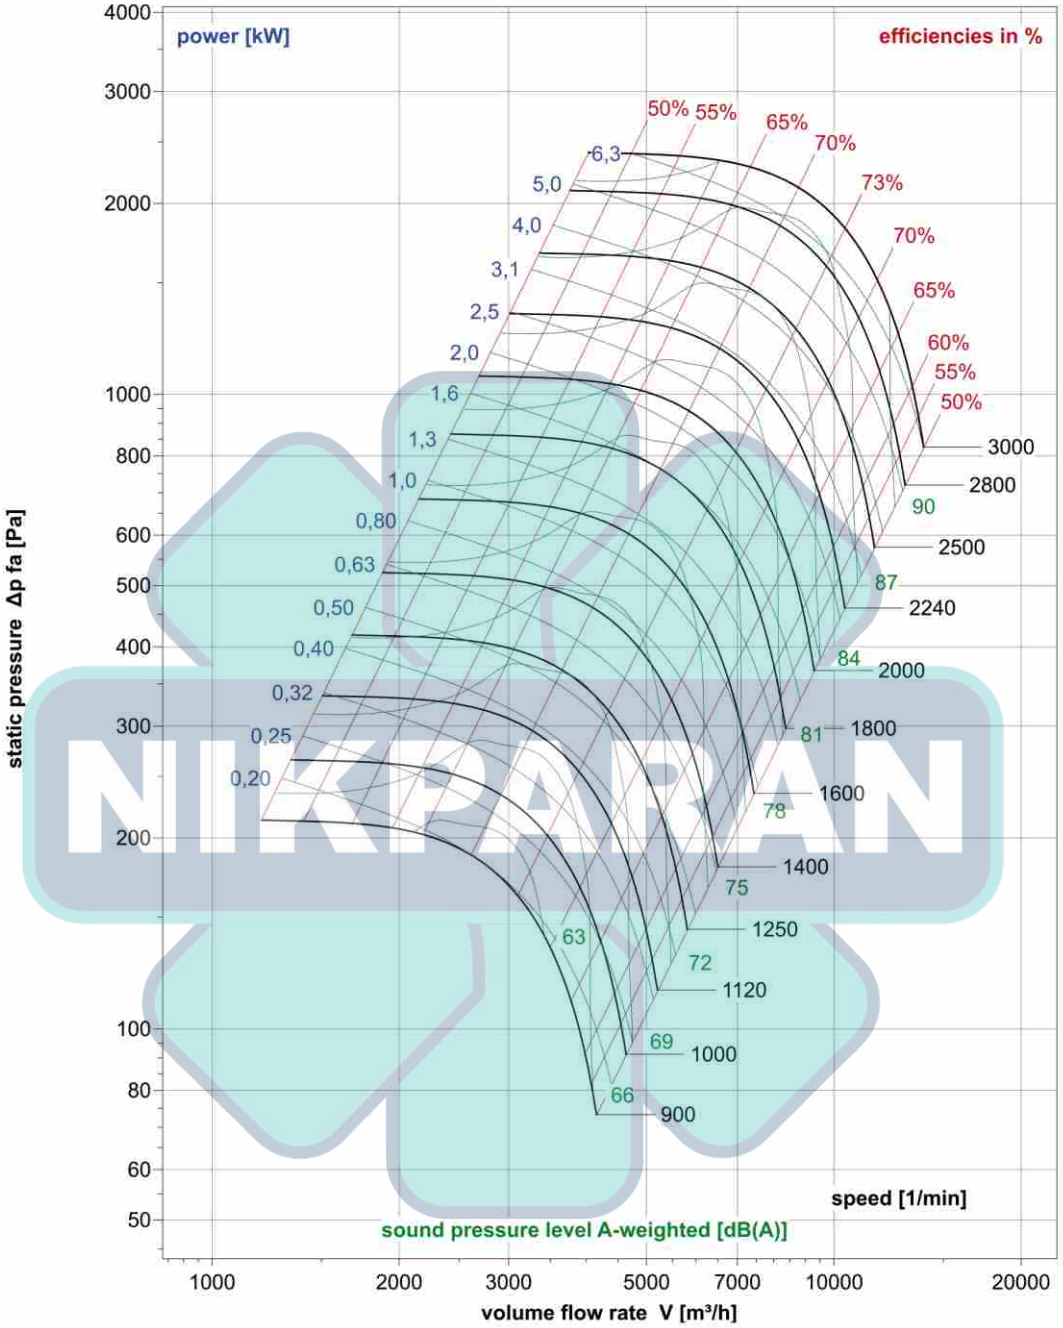

FAN SIZE		"K" factor correction for spectrum noise of CDP							
		Octave band (Hz)							
		63	125	250	500	1K	2K	4K	8K
CDP450	inlet	-6	-5	-3	-4	-8	-11	-15	-20
	outlet	-3	-2	-1	-2	-4	-8	-11	-16

Measurement according to DIN 24163 (test bench arrangement C), ρ =1.2 kg/m³, sound pressure level measured at 1 m distance


NP-CDP-500

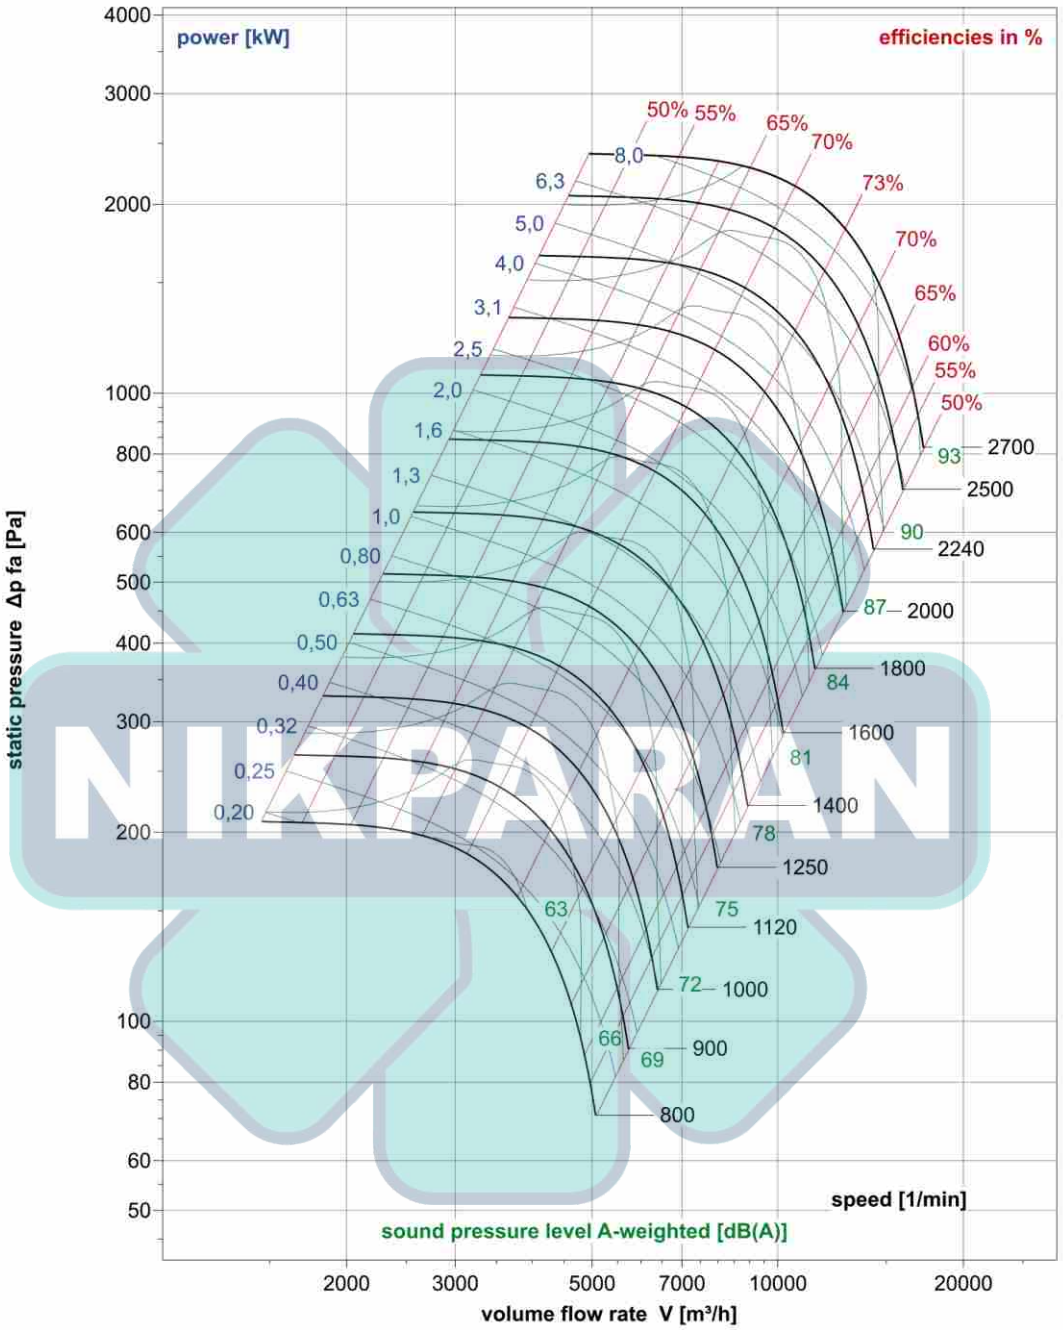

FAN SIZE		"K" factor correction for spectrum noise of CDP							
		Octave band (Hz)							
		63	125	250	500	1K	2K	4K	8K
CDP500	inlet	-6	-5	-3	-4	-8	-11	-15	-20
	outlet	-3	-2	-1	-2	-4	-8	-11	-16

Measurement according to DIN 24163 (test bench arrangement C), ρ =1.2 kg/m³, sound pressure level measured at 1 m distance


NP-CDP-560

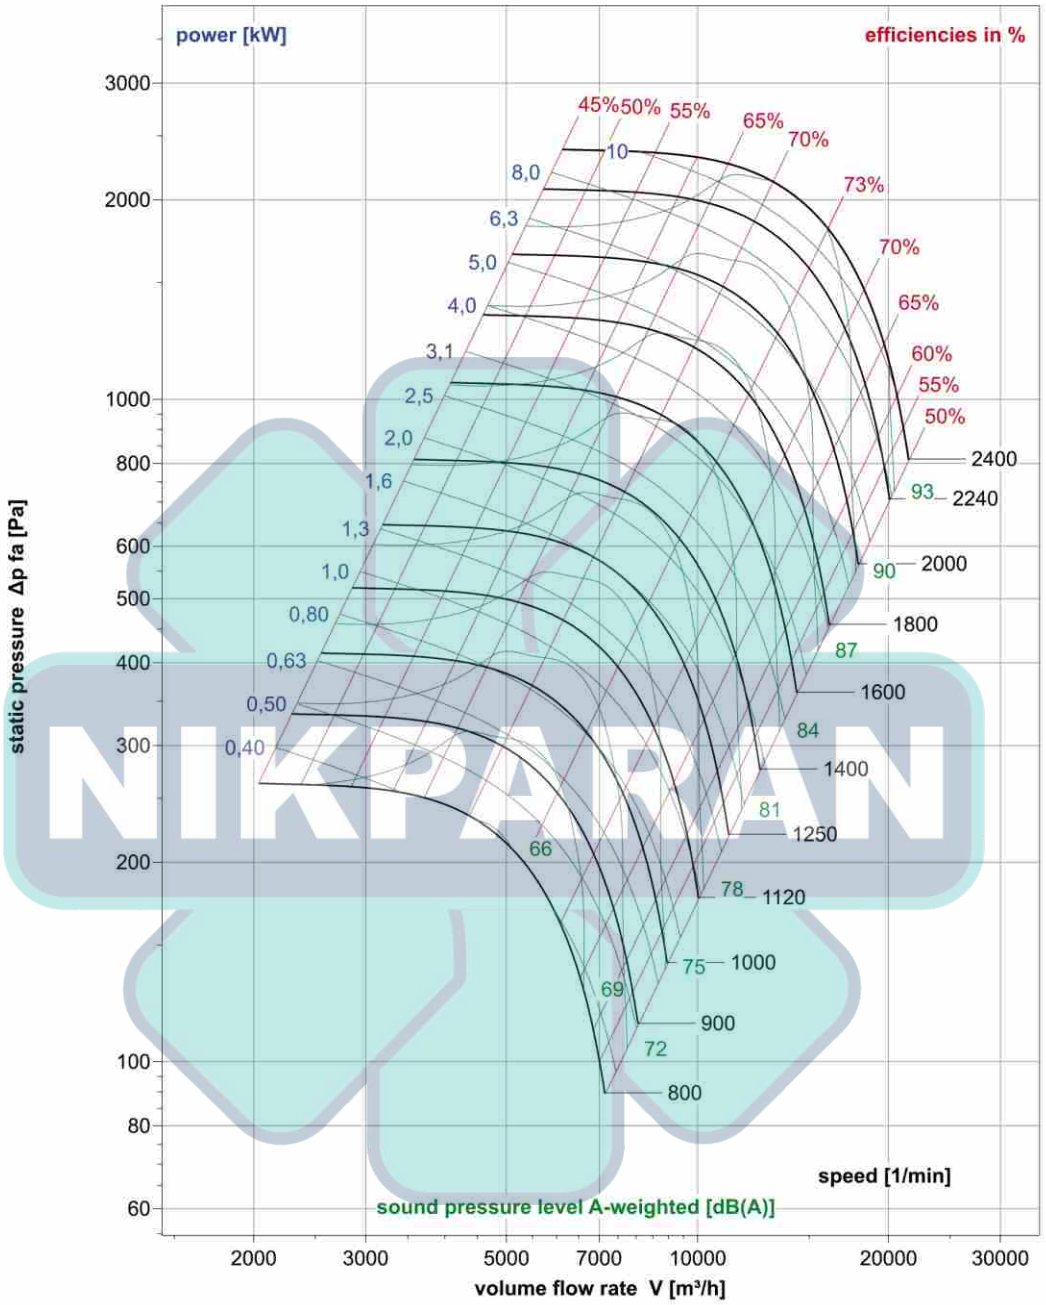

FAN SIZE		"K" factor correction for spectrum noise of CDP							
		Octave band (Hz)							
		63	125	250	500	1K	2K	4K	8K
CDP 560	inlet	-5	-2	-1	-6	-8	-10	-16	-20
	outlet	-2	0	-4	-4	-4	-7	-12	-17

Measurement according to DIN 24163 (test bench arrangement C), ρ =1.2 kg/m³, sound pressure level measured at 1 m distance

NP-CDP-630

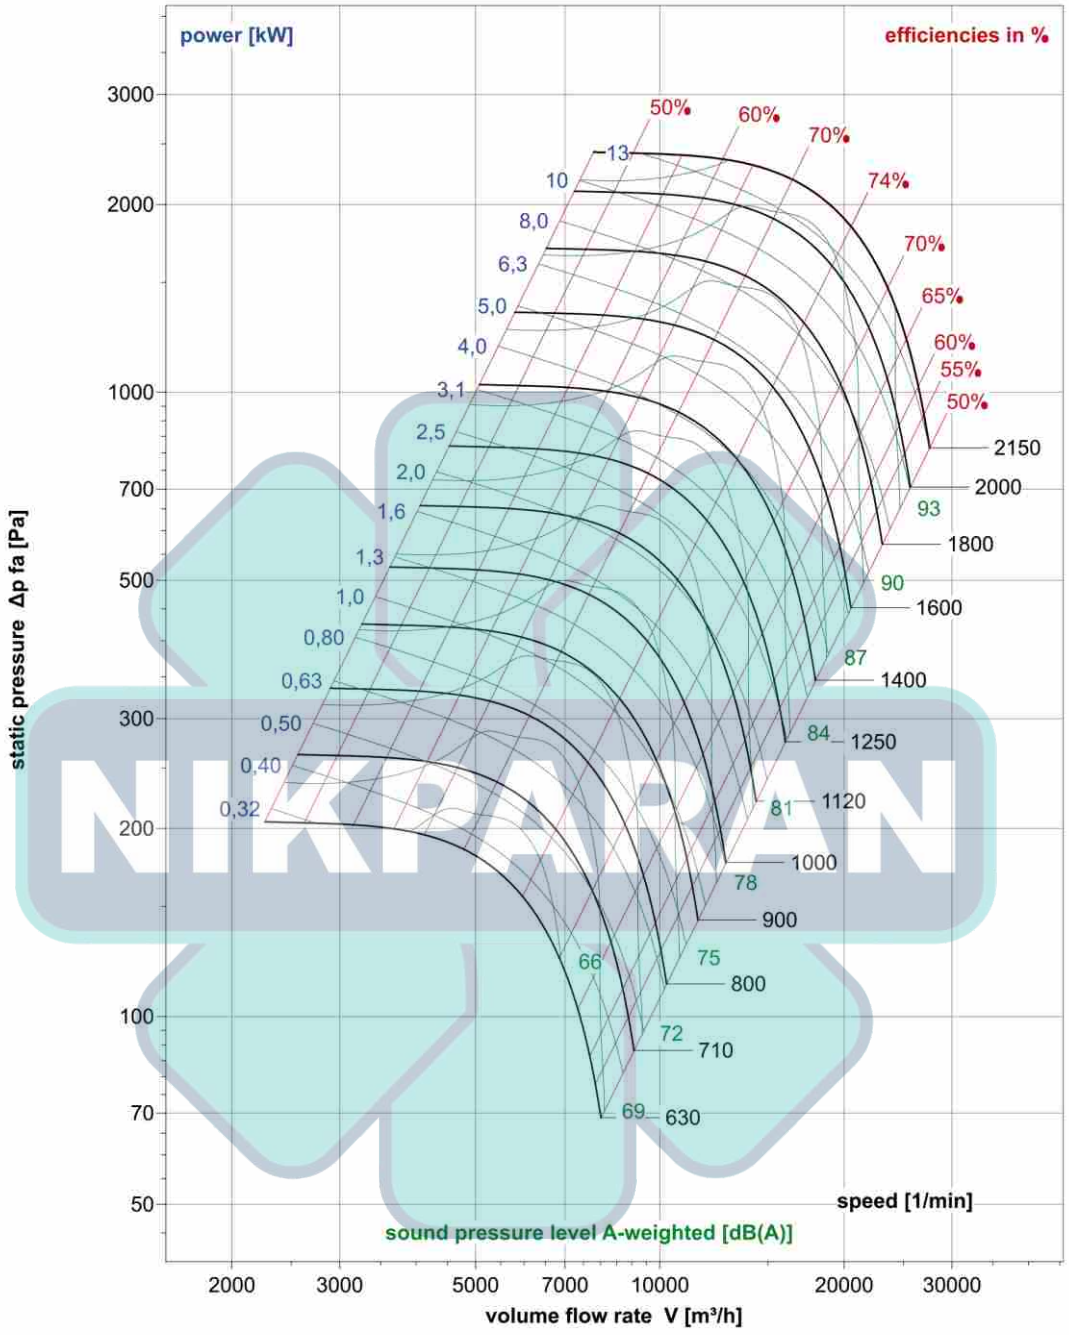


FAN SIZE		"K" factor correction for spectrum noise of CDP							
		Octave band (Hz)							
		63	125	250	500	1K	2K	4K	8K
CDP 630	inlet	-5	-2	-1	-6	-8	-10	-16	-20
	outlet	-2	0	-4	-4	-4	-7	-12	-17

Measurement according to DIN 24163 (test bench arrangement C), ρ =1.2 kg/m³, sound pressure level measured at 1 m distance

info@nikparan.ir


NP-CDP-710

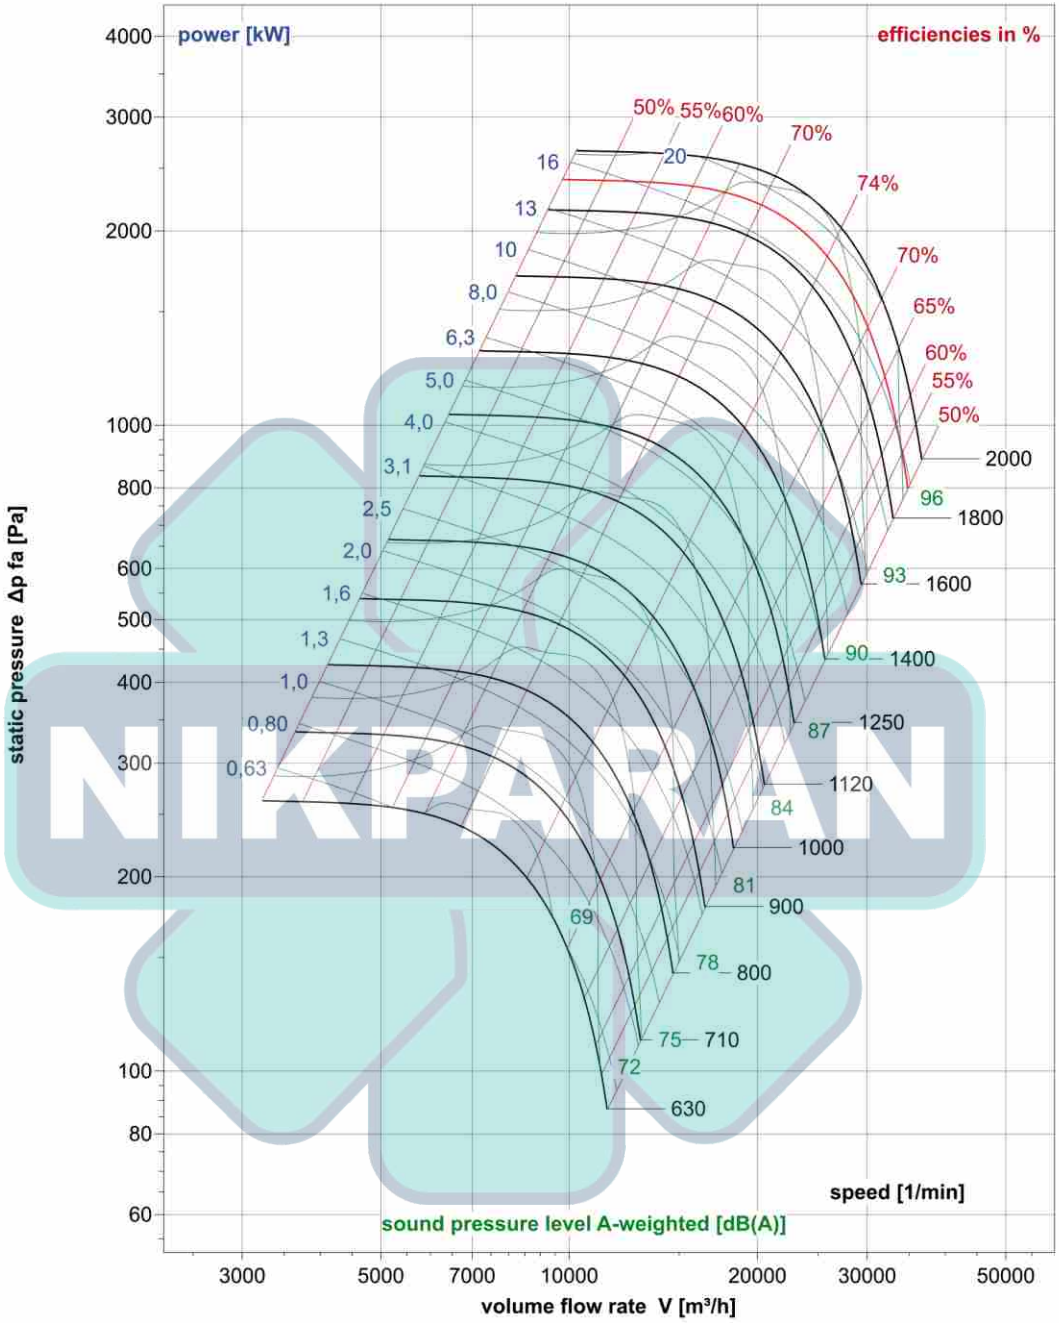

FAN SIZE		"K" factor correction for spectrum noise of CDP							
		Octave band (Hz)							
		63	125	250	500	1K	2K	4K	8K
CDP 710	inlet	-5	-2	-1	-6	-8	-10	-16	-20
	outlet	-2	0	-4	-4	-4	-7	-12	-17

Measurement according to DIN 24163 (test bench arrangement C), ρ =1.2 kg/m³, sound pressure level measured at 1 m distance


NP-CDP-800

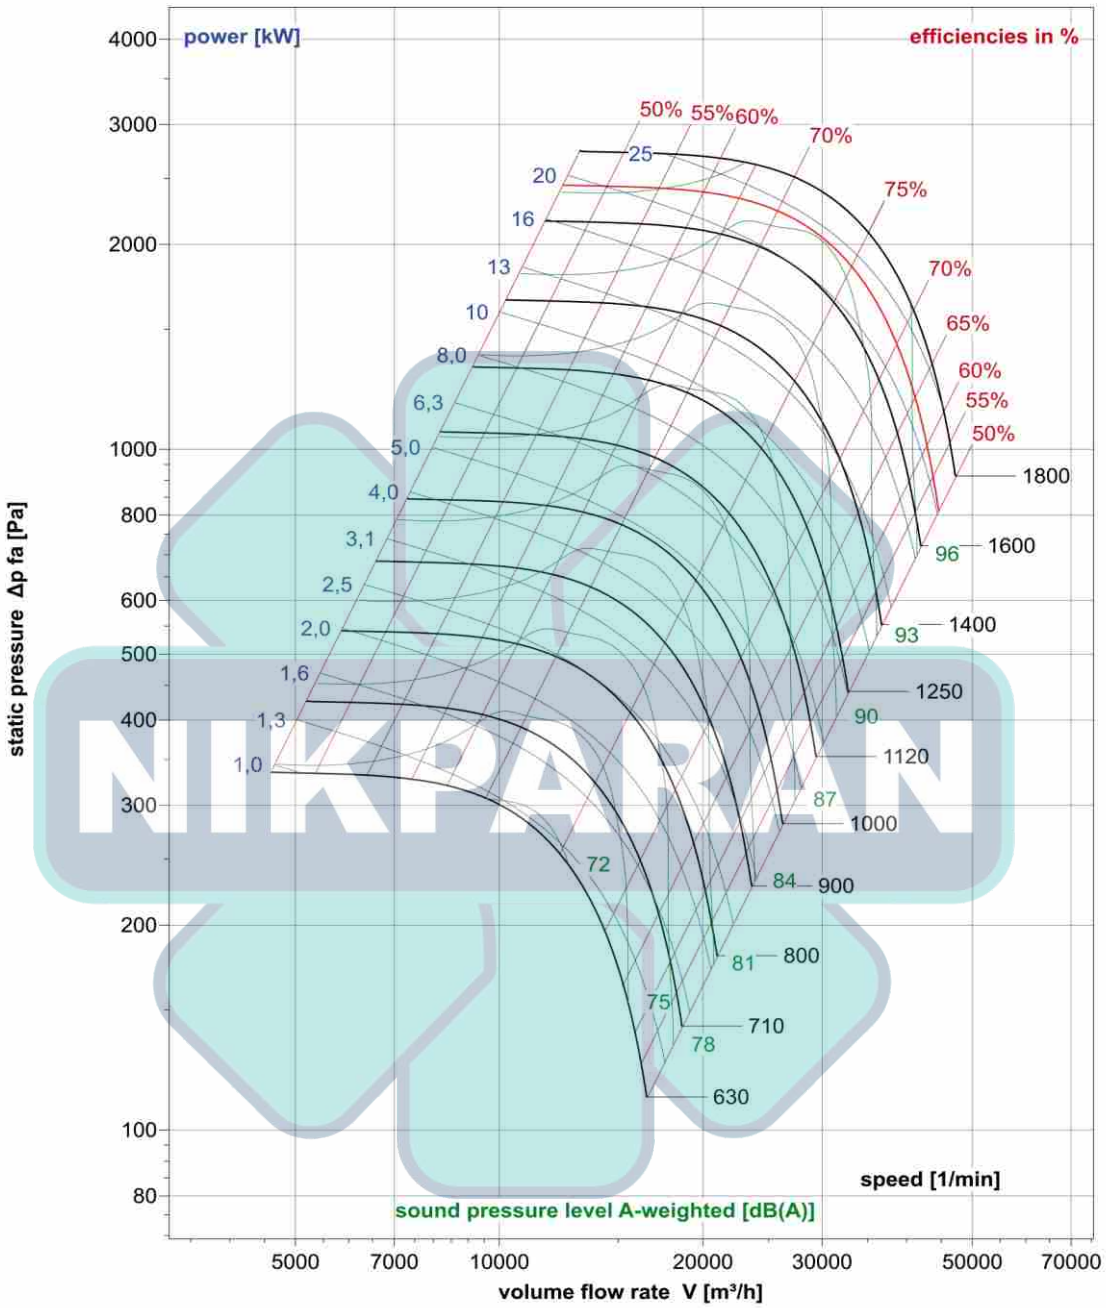

FAN SIZE		"K" factor correction for spectrum noise of CDP							
		Octave band (Hz)							
		63	125	250	500	1K	2K	4K	8K
CDP800	inlet	-3	-1	-2	-7	-7	-10	-18	-23
	outlet	1	2	-4	-4	-5	-7	-14	-19

Measurement according to DIN 24163 (test bench arrangement C), ρ =1.2 kg/m³, sound pressure level measured at 1 m distance


NP-CDP-900

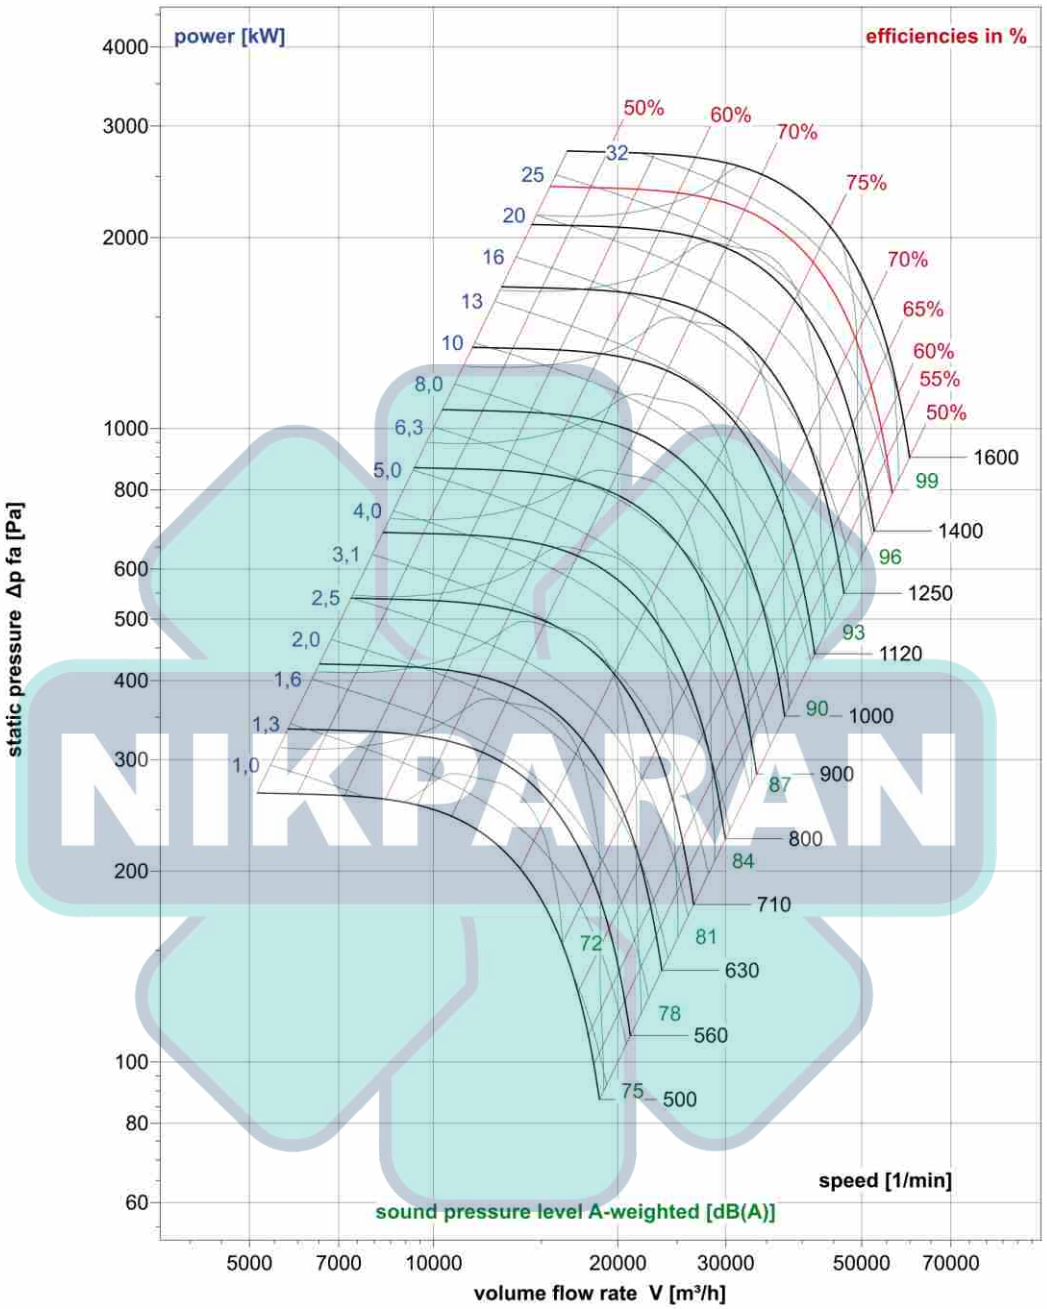

FAN SIZE		"K" factor correction for spectrum noise of CDP							
		Octave band (Hz)							
		63	125	250	500	1K	2K	4K	8K
CDP 900	inlet	-3	-1	-2	-7	-7	-10	-18	-23
	outlet	1	2	-4	-4	-5	-7	-14	-19

Measurement according to DIN 24163 (test bench arrangement C), ρ =1.2 kg/m³, sound pressure level measured at 1 m distance

NP-CDP-1000

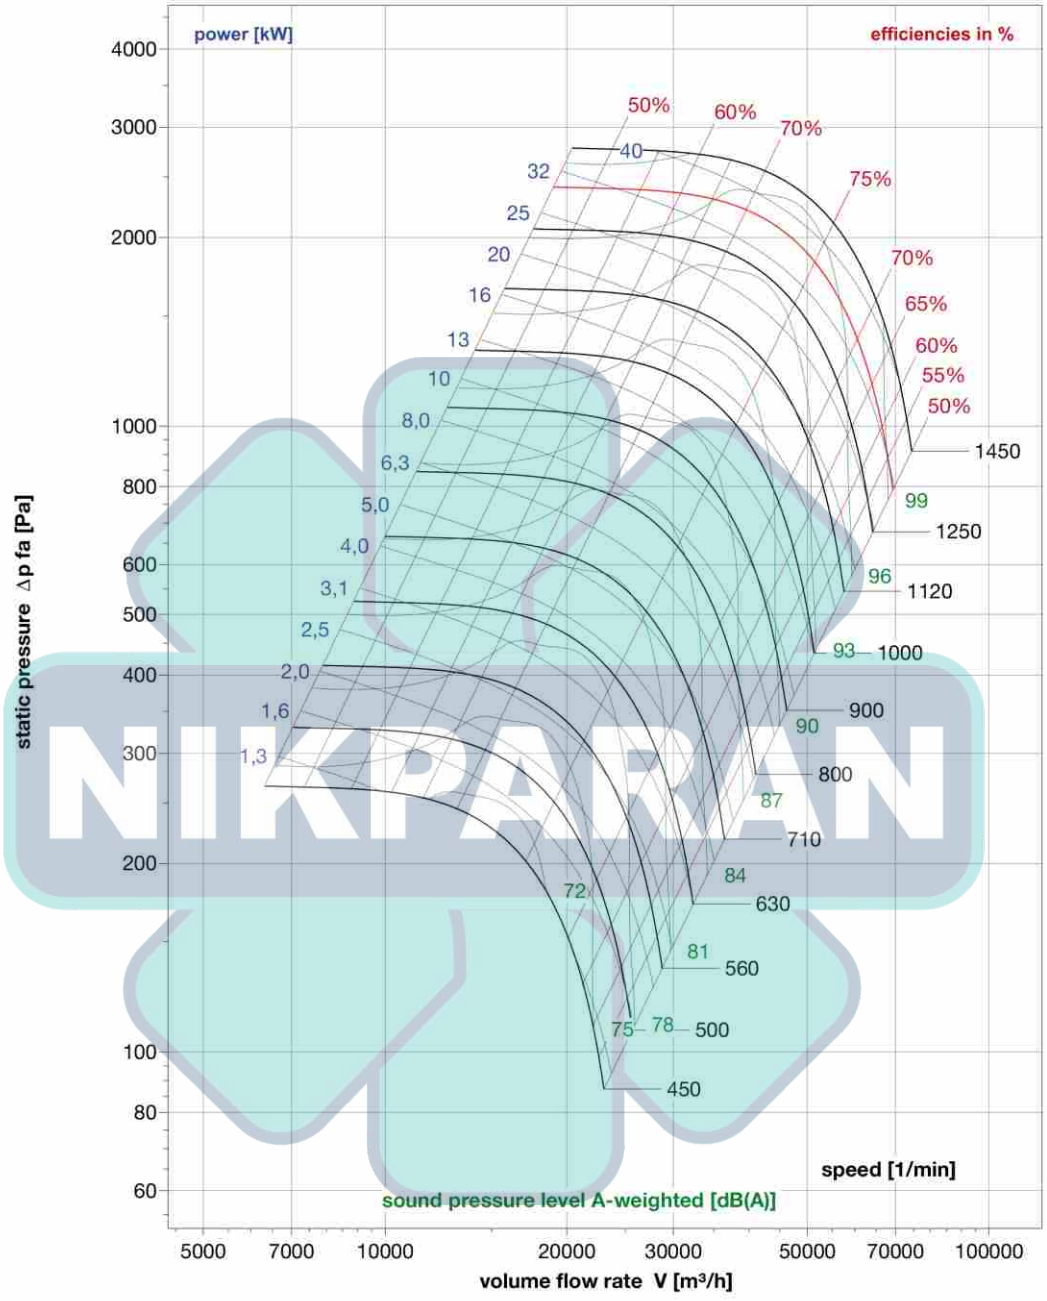

FAN SIZE		"K" factor correction for spectrum noise of CDP							
		Octave band (Hz)							
		63	125	250	500	1K	2K	4K	8K
CDP1000	inlet	-3	-1	-2	-7	-7	-10	-18	-23
	outlet	1	2	-4	-4	-5	-7	-14	-19

Measurement according to DIN 24163 (test bench arrangement C), ρ =1.2 kg/m³, sound pressure level measured at 1 m distance

www.nikparan.ir
info@nikparan.ir

Sanat-e Jam
Nik Paran Sanat-e Jam
Nik Paran Sanat-e Jam
Nik Paran Sanat-e Jam
Nik Paran Sanat-e Jam
Jam
Nik Paran Sanat-e Jam
Nik Paran Sanat-e Jam
Nik Paran Sanat-e Jam
Nik Paran Sanat-e Jam
Nik Paran Sanat-e Jam
anat-e Jam
Nik Paran Sanat-e Jam
Nik Paran Sanat-e Jam
Nik Paran Sanat-e Jam
Nik Paran Sanat

دفتر مرکزی: تهران، بزرگراه رسالت، خیابان آیت شمالی، خیابان مظاهری، پلاک ۱۳۵، واحد ۵
کارخانه: جاجرود، منطقه صنعتی کمرد، شماره ۱۶۵
تلفن: ۷۷۱۹۹۲۵۹، ۷۷۱۹۹۳۳۴
نمابر: ۷۷۴۹۸۰۱۶

Central Office: # 5, No. 135, Mazaheri St., Ayat St., Resalat Highway,Tehran-Iran
Factory: No.165, Industrial area kamard, Jajrod-Iran
Tel: +982177199259, +982177199334
Fax: +982177498016